


MOTORIZED ELECTRADROP

MOTORIZED ELECTRICAL DROP BOLT

EASY AND FAST INSTALLATION

CABLE SETUP FOR ELECTRADROP

BOLT POSITION

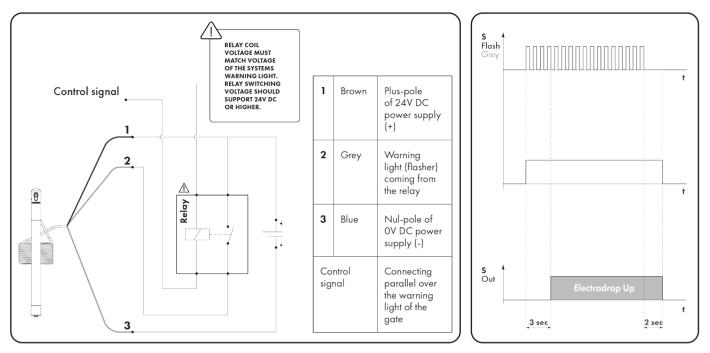

SPECIFICATIONS

- ✓ Vandal-proof, powder coated aluminium housing
- ✓ To be connected to the warning light on automated gates (min 3 sec prewarning signal) or directly on the gate automation
- ✓ Mechanical release possible (by key) in case of emergency
- The integrated obstacle detection will automatically stop the drop bolt movement in case of overpressure to avoid injuries.
- ✓ Throw: 115 mm
- ✓ Drop bolt diameter: 20 mm
- ✓ For gate profiles: 40 mm or more
- ✓ 5 m cable included
- ✓ Included: 3012-37-STD cylinder
- ✓ To connect to a Locinox DC-POWER-24V-25W power supply







THE NEW Electradrop-r




MOTORIZED ELECTRICAL DROP BOLT WITH FAIL OPEN FUNCTIONALITY




EASY AND FAST INSTALLATION

CABLE SETUP FOR ELECTRADROP RUPTURA

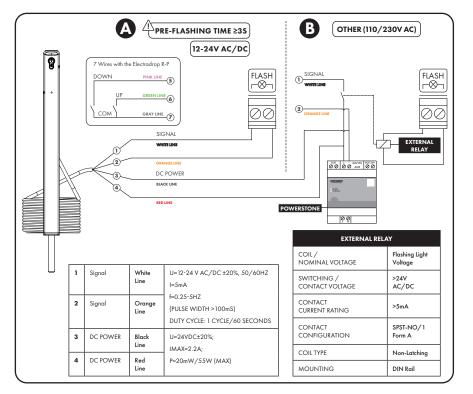

BOLT POSITION

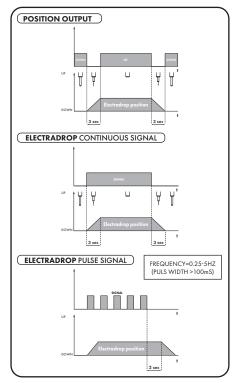

SPECIFICATIONS

✓ Fail Open functionality thanks to integrated back-up batteries (10y lifetime)

- ✓ Vandal-proof, anodized aluminium housing

- ✓ Integrated obstacle detection
- ✓ Low battery warning LED
- ✓ Very strong: >1000 kg holding force
- ✓ Throw: 120 mm
- ✓ Drop bolt diameter: 20 mm
- ✓ Support for horizontal installation

