




WWW.LOCINOX.COM

CODE: GBMU4D20


① 180° Opening - Opening - Ouverture - Öffening

Grondaanslag verplicht - Butée obligatoire - Ground stop obligatory - Grundanschlag verpflichtit

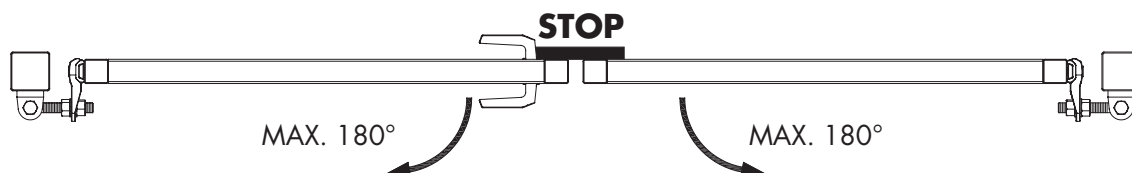

② Gewicht en afmetingen - Weight and dimensions

Poids et dimensions - Gewicht und Abmessungen

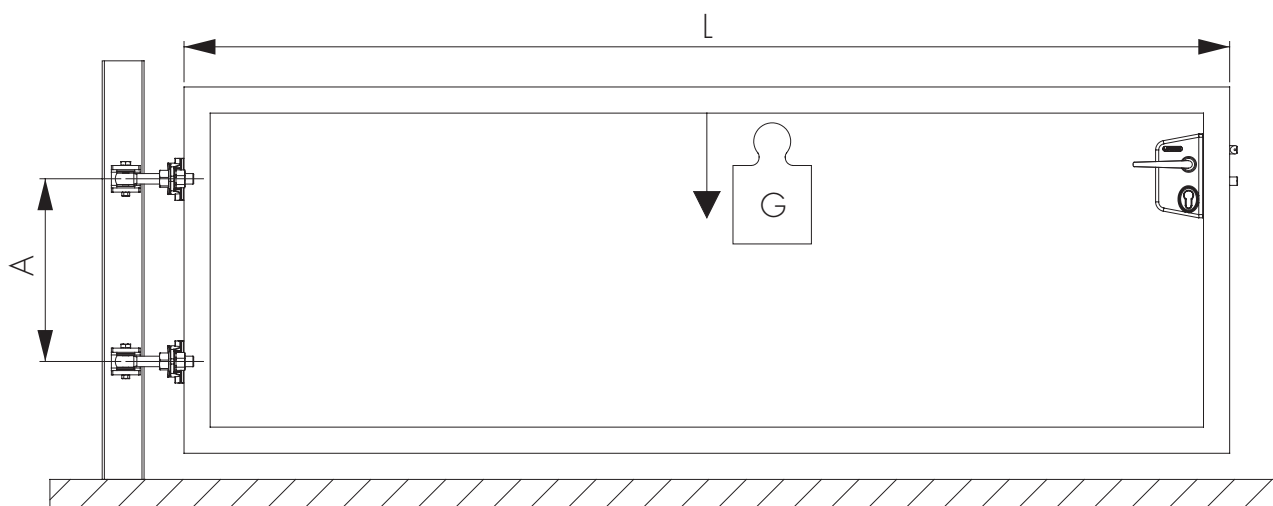


Max. trekkracht/ scharnier	Max. pull power/ hinge	Force de traction max./charnière	Max. Zugkraft/ Torband	15000 N
Veiligheidsfactor	Safety Factor	Facteur de sécurité	Sicherheitsfaktor	4

A	Min. afstand tussen de scharnieren in mm	Minimum distance between the hinges in mm	Entraxe minimum entre les charnières en mm	Min. Abstand zwischen den Torbändern in mm
L	Lengte van de poort in mm	Gate length in mm	Longueur du portail en mm	Torlänge in mm
G	Maximumgewicht van de poort in kilogram (kg)	Maximum gate weight in kilogram (kg)	Poids maximal du portail en kilogrammes (kg)	Maximumgewicht des Tores in Kilogramm (kg)

A								
500	1000	1500	2000	2500	3000	3500	4000	

L	1000	275	650	1025	1400	1775	2150	2525	2900
	1200	213	525	838	1150	1463	1775	2088	2400
	1500	150	400	650	900	1150	1400	1650	1900
	2000	88	275	463	650	838	1025	1213	1400
	2500	50	200	350	500	650	800	950	1100
	3000	25	150	275	400	525	650	775	900
	3500	0	114	221	329	436	543	650	757
G									

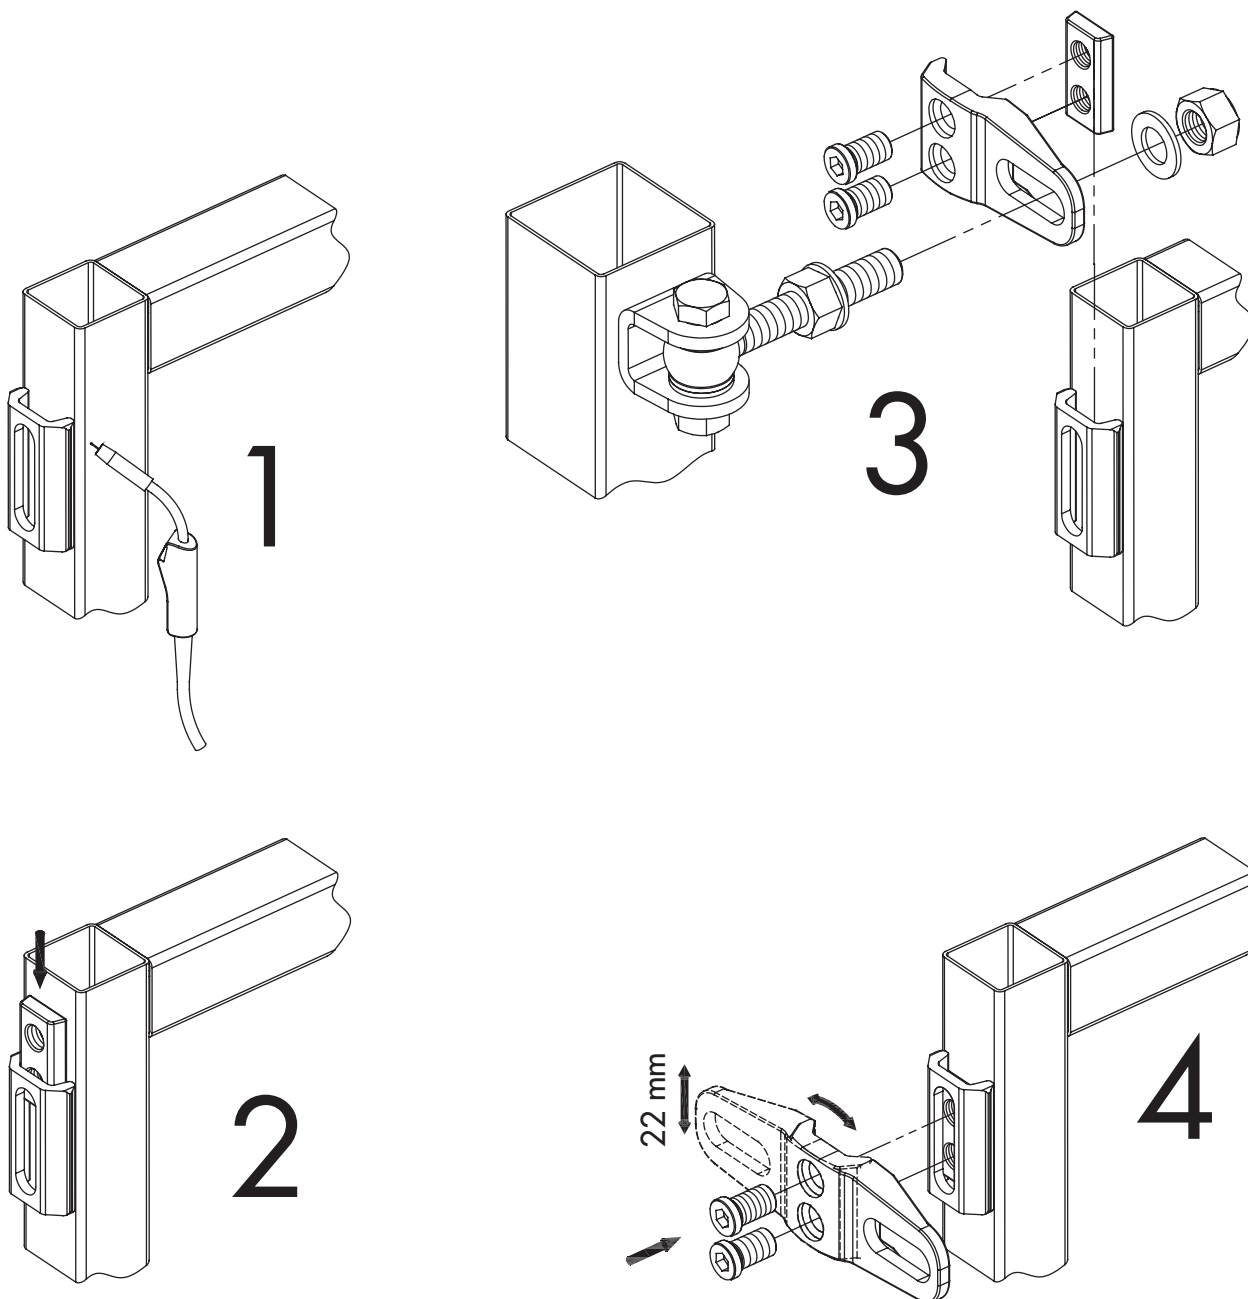

LOCINOX[®]
WWW.LOCINOX.COM

Doc. Nr.: MANU-000006

Locinox nv • Mannebeekstraat 21 • B-8790 Waregem • Belgium - Europe
Tel. +32 (0)56 77 27 66 • Fax. +32 (0)56 77 69 26 • E-mail: locinox@locinox.com



* M A N U - 0 0 0 0 0 0 6 *