



INNOVATION

EASY TO INSTALL

WEATHERPROOF









Electric insert keep for insert lock

UNIWING-compatible

This innovative electric keep pushes the daybolt outward and allows flexible positioning within the post.




Find out more: locinox.com | help@locinox.com







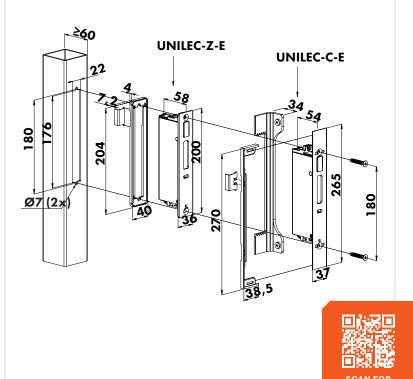

MORE INFO



Unilec

Electric insert keep for insert locks

This innovative electric keep pushes the latch bolt outward and allows flexible positioning within the post. UNILEC fits perfectly into the UNIWING profile preparation and is easily mounted with the CLICK-IT system. The sleek finish minimizes the gap between gate and post. The keep operates on 24V DC and is available with or without a stop plate. Extra security is ensured by the Fail-Close functionality.

What makes it special?

- Pushes day bolt outward
- Integrated Click-It installation system
- UNIWING-compatible
- Easy left or right changing
- Adjustable stop plate for 40 mm till 50 mm gate frames
- Compatible with FORTY-, FIFTY-, SIXTY- & EIGHTYLOCK



Features

Configurations	UNILEC-C: with stop plate UNILEC-Z: without stop plate
Profile size	UNILEC-C: gate profiles 40 mm and 50 mm UNILEC-Z: any gate profile
Post Profile	Minimum 60 mm
Built-in Depth	54 mm
Profile preparation	Locinox Uniwing cut-out
Material	Stop plate: aluminium Housing: anodised aluminium Critical components: stainless steel
Colour	RAL9005, uncoloured
Fixation	Locinox Click-It technology
Compatibility	Locinox Uniwing product portfolio
Power supply	24V DC
Power consumption	55W peak load (400 ms) 3W reduced load (trigger time 400 ms) 0W retracted state (closed)
Weather resistance	IP56
Warranty	2 years